


SCI-Chemical, Inc.

107 Quail Hollow Drive ▪ Simpsonville, SC 29681
Email: bobby@scichemical.com

ULTRASONIC CYLINDER CLEANING SYSTEMS FOR ANILOX ROLLS & SLEEVES

Wide Web

Free Standing

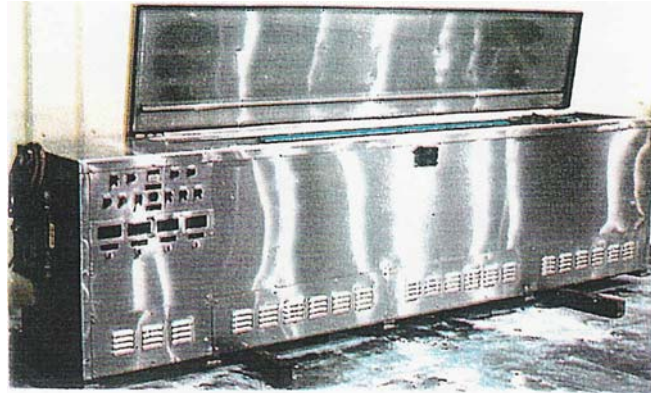

Narrow Web – Portable and Table Top



Features

- Variable Speed, Positive Drive
- All Stainless Steel Plumbing
- Controls and Generators Mounted Remotely or in Unit
- Drive Mechanism and Idler Support Traverse Allowing Different Length Cylinders to be Cleaned
- Low Level Safety

Construction:	300 Series Stainless Steel.
Input Power:	230 Volts SO/60HZ, 3 Phase, or 115 Volt
Transducer Type:	Piezoelectric Construction
Ultrasonic Frequency:	40 KHZ
Plumbing:	Stainless Steel
Electric Timer:	Digital
Heater 9KW:	Thermostat Controlled Ambient to 185° F
Filter System:	SST Housing and Plumbing. 10" Cartridge (5 to 40 Micron Available) (Optional)
Cover:	Hinged Type. Lid With Mechanically Assisted Lifters. (Optional)
Low Level Safety:	Protects Ultrasonic Transducers and Heaters.
Positioning Fixtures (2):	Adjustable Stainless Steel Construction
Rotation Device:	Rotates Rollers Approximately at (3) RPM.

Advantages

- Short Cleaning Cycles
- Less Press Downtime
- Guaranteed Full Cell Volume (equals anilox roll specification)
- Easy Access to Controls and Generators

Warranty

- Transducers – 10 years
- Generator – 2 years
- All Other Components – 1 year

PHONE 864-967-7021

FAX 864-963-3984

TOLL FREE 1-800-311-1174